


ODP121CT15-B3

SPEC		
SYSTEM	PROCESSOR	Intel Atom® Processor J1900 (4-Cores, up to 2.0GHz)
	MEMORY	4GB / 8GB
	STORAGE	64GB / 128GB
I/O Port	LAN	2 × RJ45 GbE(optional 3 x RJ45 GbE)
	USB	4 × USB
	SERIAL	2 × RS232, 2 × RS485
	AUDIO	HD Line-out or AMP-out
	VIDEO-OUT	1 × HDMI
SECURITY	TPM	TPM2.0 (optional)
OS SUPPORT	WINDOWS	Windows 10/11 IoT Enterprise Entry 64bit
	LINUX	Ubuntu 22.04, 64bit
DISPLAY	LCD A/A	12.1" (245.8mm × 184.3mm)
	RESOLUTION	800 × 600, 1024 × 768
	BRIGHTNESS	1000 cd/m ²
TOUCH	TYPE	1 ~ 10 points Projective Capacitive Touch
	COVER WINDOW	Tempered Glass (IK08)
POWER SUPPLY	INPUT	DC 12V (Recommend.)
	CONSUMPTION	≤ 40W
ENVIRONMENT	OPERATING	-30°C ~ 80°C @ ≤90% RH
	STORAGE	-40°C ~ 85°C @ ≤95% RH
	IP GRADE	IP 65 (Front Side)
	Total Solar Energy Rejected (TSER)	52% (UV / IR optional)
MECHANISM	DIMENSION	390mm × 315mm
	HEIGHT	70.5mm
	WEIGHT	5.7kg (Gross Weight : 7.1kg)
CERTIFICATIONS	CERTIFICATION	CE (R-R-ODR-ODP150CT15B3)
OTHERS	WARRANTY	1 years
LCD LIFE TIME		30,000Hour

DIMENSION

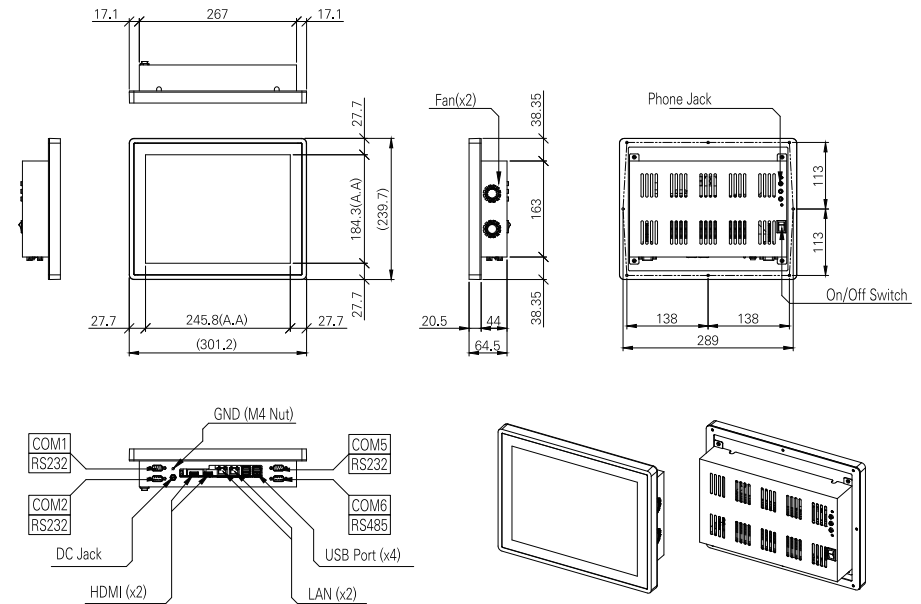

Key Features



Outdoor Usage

IP65, IK08 Robust to Solar Radiation



High Brightness

1000 cd/m²




Dual Display

HDMI, LVDS



RICH I/O Connectivity

GbE LAN, USB 3.0
USB 2.0, RS232/485



Security

TPM 2.0

- 본 도면은 간략하게 표현된 도면으로, 일부 구성 요소는 자세히 표시되어 있지 않습니다.
- 제품 관련 추가 정보는 당사 영업 담당자에게 문의하십시오.
- 맞춤형 또는 I/O가 포함된 도면의 경우, 영업팀에 문의하십시오.